### **MINI PRODUCT RANGE**

## Minimum size, maximum performance!

For sauces, emulsions and small preparations.

#### HANDLE DESIGN .....

for easy grip and effortless use.



**Detachable stainless steel blade and shaft** for perfect hygiene.





Blade designed for optimum blending.



• VARIABLE SPEED BUTTON Easy to see and adjust.

### STAINLESS STEEL MOTOR HOUSING

To make the immersion blender last longer.



### **AEROMIX**

Patented emulsifying tool designed to make instant light fluffy **emulsions** that always keep their shape on the plate.



### **BLADE**



**AEROMIX** For emulsions

















270 W
Single phase
2 000 to 12 500 rpm
Length 190 mm - all s steel
✓
✓
 ✓
Length 485 mm, Ø 78
 2.5 kg
Ctainless steel Asker

### Mini MP 160 V.V. Mini MP 190 V.V. Mini MP 240 V.V.

Power	240 W	270 W	290 W
Voltage	Single phase	Single phase	Single phase
Speed	2 000 to 12 500 rpm	2 000 to 12 500 rpm	2 000 to 12 500 rpm
Blade, bell and shaft	Length 160 mm - all stainless steel	Length 190 mm - all stainless steel	Length 240 mm - all stainless steel
Removable blade	<b>√</b>	<b>✓</b>	<b>√</b>
Removable bell	No	<b>√</b>	<b>√</b>
Removable foot	✓	<b>√</b>	<b>√</b>
Dimensions	Length 455 mm, Ø 78 mm	Length 485 mm, Ø 78 mm	Length 535 mm, Ø 78 mm
Gross weight	2.4 kg	2.5 kg	2.5 kg
Accessories	Stainless steel Aeromix Included Wall support - Included	Stainless steel Aeromix Included Wall support - Included	Stainless steel Aeromix Included Wall support - Included

Choose your model:



Mini MP 160 V.V.	Ref.	
Mini MP 160 V.V. 230V/50/1	34740	
Mini MP 160 V.V. 230V/50/1 UK plug	34741	
Mini MP 160 V.V. 220V/60/1	34744	
Mini MP 160 V.V. 120V/60/1	34745	

Mini MP 190 V.V.	Ref.	
Mini MP 190 V.V. 230V/50/1	34750	
Mini MP 190 V.V. 230V/50/1 UK plug	34751	
Mini MP 190 V.V. 220V/60/1	34754	
Mini MP 190 V.V. 120V/60/1	34755	

Mini MP 240 V.V.	Ref.	
Mini MP 240 V.V. 230V/50/1	34760	
Mini MP 240 V.V. 230V/50/1 UK plug	34761	
Mini MP 240 V.V. 220V/60/1	34764	
Mini MP 240 V.V. 120V/60/1	34765	





### CMP COMPACT PRODUCT RANGE

Compact, easy-to-handle, high-performance.



#### **PERFORMANCE**

Optimum blending for a fine textured end product in a minimum amount of time.



#### LONG SERVICE LIFE .....

Stainless steel motor base for intensive use.

#### DURABILITY .....

Equipped with a 3-level watertightness system.



#### CLEANING .....

Removable stainless steel bell and blade for easy cleaning and maintenance.



CMP300 V.V.

#### **POWERFUL**

#### **High-Power motor:**

+15 % for greater efficiency.

#### **COMFORT**

**Variable speed** for greater flexibility when making sophisticated preparations.



#### **ERGONOMICS**

Light, compact, easy-to-handle appliance.

The lug on the motor base can be used to rest the mixer on the rim of a pan to make it easier to handle and remove some of the strain.

**New cord winder** to make it easier to store and prevent wear and tear.



- 1 The new patented "EasyPlug" system means that the power cord can be easily replaced during aftersales servicing.
- 2 Indicator light: rapid detection of power cord failure. The green light comes on if the cord is undamaged and correctly plugged in on both sides (wall socket and EasyPlug).







### CMP 250 V.V. CMP 300 V.V. CMP 350 V.V. CMP 400 V.V.

Power	310 W	350 W	400 W	420 W
Voltage	Single phase	Single phase	Single phase	Single phase
Speed	2 300 to 9 600 rpm (self regulating system)	2 300 to 9 600 rpm (self regulating system)	2 300 to 9 600 rpm (self regulating system)	2 300 to 9 600 rpm (self regulating system)
Blade, bell and shaft	Length 250 mm - all stainless steel	Length 300 mm - all stainless steel	Length 350 mm - all stainless steel	Length 400 mm - all stainless steel
Removable blade	✓	✓	✓	✓
Removable bell	✓	✓	✓	✓
Removable foot	No	No	No	No
Dimensions	Length 650 mm, Ø 94 mm	Length 660 mm, Ø 94 mm	Length 700 mm, Ø 94 mm	Length 763 mm, Ø 94 mm
Gross weight	3.9 kg	3.9 kg	4.1 kg	4.1 kg
Accessories	Wall support - Included			

Choose your model:



CMP 250 V.V. / CMP 300 V.V.	Ref.	
CMP 250 V.V. 230V/50/1	34240B	
CMP 250 V.V. 230V/50/1 UK plug	34241B	
CMP 250 V.V. 220V/60/1	34244B	
CMP 250 V.V. 120V/60/1	34245B	
CMP 300 V.V. 230V/50/1	34230B	
CMP 300 V.V. 230V/50/1 UK plug	34231B	
CMP 300 V.V. 220V/60/1	34234B	
CMP 300 V.V. 120V/60/1	34235B	

Ref.	
34250B	
34251B	
34254B	
34255B	
34260B	
34261B	
	34250B 34251B 34254B 34255B 34260B



CMP 250 Combi



**Whisk function** 

CMP 300 Combi

See page 139

### **MP/CMP PAN SUPPORTS**

### Pan supports reduce MSD risks, relieve strain and make it easier to control preparations.

They enable the immersion blender to be tilted effortlessly or left to do the job by itself.

Made entirely of stainless steel, they can be removed completely, are easy to clean and practical to use.



### **1** Universal pan support: Fits all pan sizes.







Three pan supports are available as an option. They adapt to the size of the

- pan Ø from 330 mm to 650 mm.
- pan Ø from 500 mm to 1 000 mm.
- pan Ø from 850 mm to 1 300 mm.







### Stainless steel pan supports

1 universal stainless steel pan support 1	Ref.
To be attached to the edge of the pan.	27358
3 adjustable stainless steel pan supports 2	Ref.
For 330 to 650 mm diameter pans	27363
For 500 to 1000 mm diameter pans	27364
For 850 to 1300 mm diameter pans	27365







### MP ULTRA LARGE PRODUCT RANGE

### **Even better performance and ergonomics!**

#### **ERGONOMICS**

Ergonomic handle for greater user comfort.

# 0

MP 450 Ultra



The MP V.V. and MP Combi models feature an **ergonomic variable speed button** for greater user comfort.

#### PERFORMANCE .....

High-power motor and increased performance to **optimise blending time.** 



#### 

Stainless steel motor base for intensive use.



#### **ERGONOMICS**

#### The lug on the motor base

can be used to rest the mixer on the rim of the pan to make it easier to handle and relieve some of the strain.

#### New cord winding system

to make it easier to store and prevent wear and tear.





#### CLEANING .....

Removable stainless steel bell and blade for easy cleaning and maintenance.

Patented Robot-Coupe system.



New EasyGrip removable handle. The machine's weight is distributed better making it even easier to use!



### **AFTER SALES SERVICE: DETACHABLE POWER CORD**

- The patented "EasyPlug" system means that the power cord can be easily replaced during after-sales servicing.
- Indicator light: quick detection of power cord failure. The green light comes on if the cord is undamaged and correctly plugged in on both sides (wall socket and EasyPlug).









### MP 350 Ultra

440 W
Single phase
9 500 rpm
Length 350 mm - all stainless steel
✓
✓
No
✓
Length 740 mm, Ø 125 mm
6.2 kg
Wall support - Included

### MP 350 Ultra V.V.

440 W
Single phase
1 500 to 9 000 rpm (self regulating system)
Length 350 mm - all stainless steel
✓
✓
No
✓
Length 740 mm, Ø 125 mm
6.4 kg
Wall support - Included

Choose your model:



MP 350 Ultra	Ref.	
MP 350 Ultra 220-240V/50-60/1	34800L	
MP 350 Ultra 240V/50-60/1 UK plug	34801L	
MP 350 Ultra 120V/60/1	34805L	

MP 350 Ultra V.V.	Ref.	
MP 350 V.V. Ultra 220-240V/50-60/1	34840L	
MP 350 V.V. Ultra 240V/50-60/1 UK plug	34841L	
MP 350 V.V. Ultra 120V/60/1	34845L	



**Whisk function** 

MP 350 Combi Ultra

See page 140

	MP 350 Ultra / MP 350 Ultra V.V.	
Options	Ref.	
EasyGrip removable handle	27359	





### MP 450 Ultra

Power	500 W
Voltage	Single phase
Speed	9 500 rpm
Blade, bell and shaft	Length 450 mm - all stainless steel
Removable blade	✓
Removable bell	✓
Removable foot	No
EasyPlug	✓
Dimensions	Length 840 mm, Ø 125 mm
Gross weight	6.3 kg
Accessories	Wall support - Included

### MP 450 Ultra V.V.

500 W
Single phase
1 500 to 9 000 rpm (self regulating system)
Length 450 mm - all stainless steel
<b>√</b>
✓
No
✓
Length 840 mm, Ø 125 mm
6.5 kg
Wall support - Included

Choose your model:



MP 450 Ultra	Ref.	
MP 450 Ultra 220-240V/50-60/1	34810L	
MP 450 Ultra 240V/50-60/1 UK plug	34811L	
MP 450 Ultra 120V/60/1	34815L	

MP 450 Ultra V.V.	Ref.
MP 450 V.V. Ultra 220-240V/50-60/1	34850L
MP 450 V.V. Ultra 240V/50-60/1 UK plug	34851L
MP 450 V.V. Ultra 120V/60/1	34855L



**Whisk function** MP 450 Combi Ultra

See page 140

	MP 450 Ultra / MP 450 Ultra V.V.	
Options	Ref.	
EasyGrip removable handle	27359	







### MP 550 Ultra

_	
Power	750 W
Voltage	Single phase
Speed	9 000 rpm
Blade, bell and shaft	Length 550 mm - all stainless steel
Removable blade	✓
Removable bell	✓
Removable foot	No
Second handle	Removable <b>EasyGrip</b> handle
Electronic booster system	No
EasyPlug	✓
Dimensions	Length 940 mm, Ø 125 mm
Gross weight	6.6 kg
Accessories	Wall support - Included

Choose



MP 550 Ultra	Ref.	
MP 550 Ultra 220-240V/50-60/1	34820LH	
MP 550 Ultra 240V/50-60/1 UK plug	34821LH	
MP 550 Ultra 120V/60/1	34825LH	

### MP 600 Ultra

850 W
Single phase
9 500 rpm
Length 600 mm - all stainless
steel
✓
✓
No
Removable EasyGrip handle
No
<b>✓</b>
Length 980 mm, Ø 125 mm
7.4 kg
Wall support - Included

MP 600 Ultra	Ref.	
MP 600 Ultra 220-240V/50-60/1	34830LH	
MP 600 Ultra 240V/50-60/1 UK plug	34831LH	
MP 600 Ultra 120V/60/1	34835LH	

### MP 800 Turbo

1 000 W
Single phase
9 500 rpm
Length 740 mm - all stainless steel
✓
<b>✓</b>
✓
Integrated stainless steel handle
✓
<b>√</b>
Length 1 130 mm, Ø 125 mm
9.2 kg
Wall support - Included

MP 800 Turbo	Ref.	
MP 800 Turbo 220-240V/50-60/1	34890L	
MP 800 Turbo 240V/50-60/1 UK plug	34891L	
MP 800 Turbo 120V/60/1	34895L	

### **SPECIAL RANGE FOR TILTING PANS**

Your culinary equipment evolves, so do our Immersion Blenders.

New Special MP range for Tilting Pans is pefectly suited for use with tilting bratt pans, from the smallest to the largest.

These new shorter and easier-to-handle Robot-Coupe Immersion Blenders are #THEsolution for even more convenient and comfortable use.

robot acoupe

MP 800 Turbos



#### DUMER

High-power motor designed for mixing large quantities in tilting bratt pans.



#### LONG SERVICE LIFE .....

Stainless steel motor base for intensive use. Stainless steel shaft, bell and blade. Reinforced bell.



#### DURABILITY .....

Equipped with a 6-level watertightness system.



#### CLEANING -----

Removable stainless steel bell and blade for easy cleaning and maintenance.

Patented Robot-Coupe system.



BACK TO SUMMARY

### EASY TO USE

**ERGONOMICS** 

Reinforced bell with a stainless steel ring that makes the appliance easy to glide in a tilting bratt pan, with excellent manoeuvrability.

**Double handle - Maximum comfort!** Ergonomic handles for optimum user comfort, easy to use thanks to better distribution of the machine's weight!

### AFTER SALES SERVICE: DETACHABLE POWER CORD

- The patented "EasyPlug" system means that the power cord can be easily replaced during after-sales servicing.
- Indicator light: quick detection of power cord failure. The green light comes on if the cord is undamaged and correctly plugged in on both sides (wall socket and EasyPlug).







### **CMP 300 V.V.**

Wattage	350 W
Voltage	Single phase
Speed	2300 to 9600 rpm (self regulating system)
Blade, bell and shaft	Length 300 mm - all stainless steel
Removable blade	✓
Reinforced bell	No
Removable bell	✓
Removable foot	No
Second handle	No
Electronic booster system	No
EasyPlug	✓
Dimensions	Length 660 mm, Ø 94 mm
Gross weight	3,9 kg
Accessories	Wall support - Included

#### Choose your model:



CMP 300 V.V.	Ref.	
CMP 300 V.V. 230V/50/1	34230B	
CMP 300 V.V. 230V/50/1 UK plug	34231B	
CMP 300 V.V. 220V/60/1	34234B	
CMP 300 V.V. 120V/60/1	34235B	

### MP 350 Ultra TP MP 800 Turbo TP

440 W Single phase 9500 rpm
Length 350 mm - all stainless steel
✓
✓
✓
No
Removable EasyGrip handle
No
✓
Length 763 mm, Ø 125 mm
8 kg
Wall support - Included

MP 350 Ultra TP	Ref.	
MP 350 Ultra TP 220-240V/50-60/1	34590L	
MP 350 Ultra TP 240V/50-60/1 UK plug	34591L	
MP 350 Ultra TP 120V/60/1	34595L	

1 000 W Single phase 9500 rpm
Length 350 mm - all stainless steel
<b>√</b>
✓
✓
✓
Integrated stainless steel handle
Electronic booster system for motor
✓
Length 845 mm, Ø 125 mm
8,2 kg
Wall support - Included

MP 800 Ref. Turbo TP MP 800 Turbo TP 34790L 220-240V/50-60/1 MP 800 Turbo TP 34791L 240V/50-60/1 UK plug MP 800 Turbo TP 34795L 120V/60/1

### WHICH MACHINE FOR YOUR TILTING PAN?

	Tilting pan depth 150-200 mm	Tilting pan depth 250-300+ mm	
Volume (L)	< 30	50-100	100+
Motor base	CMP 300 V.V.	MP 350 Ultra TP	MP 800 Turbo TP

### **COMBI PRODUCT RANGE**

The Robot-Coupe whisk attachment available for Mini MP Combi, CMP Combi, MP Combi Ultra and MP FW mixers is designed to emulsify, mix, shell, beat and knead.

#### **POWERFUL**

**High-strength motor:** +15 % for greater efficiency.

#### **EASY TO OPERATE**

Variable speed button easy to use with one hand.

> robot + coupe MP 450 F.W. Ultra

#### **ERGONOMIC**

Ergonomic handle for easier grasping.

#### **CONVENIENT**

Self regulating speed system for sophisticated preparations.

Salad dressing, mayonnaise, sauces, etc.



MIX



Pancake batter, tomato pulp, seasoning, etc.





Semolina, rice, wheat, quinoa, etc.



Egg whites, chocolate mousse, whipped cream, etc.





Mashed potatoes, doughnut dough,





### **METAL WHISK BOX**

#### **HEAVY DUTY**

Metal gears inside 2 metal housings to stand up to heavy duty use.

robot in coupe CMP 300 Cents

#### **CLEANING**

Overmoulded whisks to ensure perfect hygiene.

#### **ERGONOMIC**

Fast coupling of whisks to the gearbox and the gearbox to the motor housing for easy assembly and disassembly.



### Mini MP 190 Combi

Power	270 W
Voltage	Single phase
Speed	2 000 to 12 500 rpm for mixer function 350 to 1 560 rpm for whisk function
Blade, bell and shaft	Length 190 mm - all stainless steel
Removable blade	✓
Removable bell	✓
Removable foot	✓
Metal whisk box	✓
Detachable whisk	✓
Dimensions	Total length with tube 485 mm with whisk 550 mm, Ø 78 mm
Gross weight	2.7 kg
Accessories	Wall support - Included

#### Choose your model:



Mini MP 190 Combi	Ref.
Mini MP 190 Combi 230V/50/1	34770
Mini MP 190 Combi 230V/50/1 UK plug	34771
Mini MP 190 Combi 220V/60/1	34774
Mini MP 190 Combi 120V/60/1	34775

### Mini MP 240 Combi 200 W

290 W
Single phase
2 000 to 12 500 rpm for mixer function 350 to 1 560 rpm for whisk function
Length 240 mm - all stainless steel
✓
✓
✓
✓
✓
Total length with tube 535 mm with whisk 550 mm, $\emptyset$ 78 mm
2.8 kg

Wall support - Included

Mini MP 240 Combi	Ref.
Mini MP 240 Combi 230V/50/1	34780
Mini MP 240 Combi 230V/50/1 UK plug	34781
Mini MP 240 Combi 220V/60/1	34784
Mini MP 240 Combi 120V/60/1	34785

	Mini MP 190 Combi		Mini MP 240 Combi	
Option	Ref.		Ref.	
Mini MP whisk attachment	27333		27333	



### CMP 250 Combi

Power	310 W
Voltage	Single phase
Speed	2 300 to 9 600 rpm for mixer function, 500 to 1 800 rpm for whisk function with self regulating speed system
Blade, bell and shaft	Length 250 mm - all stainless steel
Removable blade	✓
Removable bell	✓
Removable foot	√ equipped with a 3-level watertightness system
Metal whisk box	<b>✓</b>
Detachable whisk	<b>√</b>
Dimensions	Total length with tube 640 mm with whisk 610 mm, Ø 125 mm
Gross weight	5.6 kg
Accessories	Wall support - Included

Choose your model:




CMP 250 Combi	Ref.	
CMP 250 Combi 230V/50/1	34300B	
CMP 250 Combi 230V/50/1 UK plug	34301B	
CMP 250 Combi 220V/60/1	34304B	
CMP 250 Combi 120V/60/1	34305B	

### CMP 300 Combi

350 W
Single phase 2 300 to 9 600 rpm for mixer function, 500 to 1 800 rpm for whisk function with self regulating speed system
Length 300 mm - all stainless steel  ✓
✓ equipped with a 3-level watertightness system
<b>√</b>
<b>√</b>
Total length with tube 700 mm with whisk 610 mm, Ø 125 mm
5.7 kg
Wall support - Included

CMP 300 Combi	Ref.	
CMP 300 Combi 230V/50/1	34310B	
CMP 300 Combi 230V/50/1 UK plug	34311B	
CMP 300 Combi 220V/60/1	34314B	
CMP 300 Combi 120V/60/1	34315B	

	CMP 250 Combi	CMP 300 Combi
Options	Ref.	Ref.
CMP Combi whisk attachment	27248	27248
Mixer foot	27249	27250

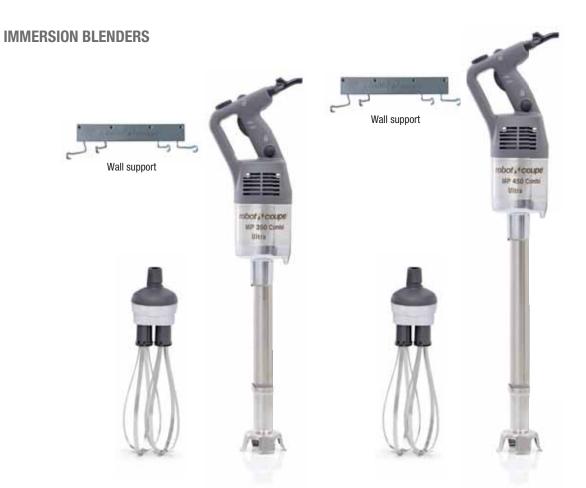

### MP 350 Combi Ultra

Power	440 W
Voltage	Single phase
Speed	1 500 to 9 000 rpm for mixer, 250 to 1 500 rpm for whisk with self regulating speed system
Blade, bell and shaft	Length 350 mm - all stainless steel
Removable blade	<b>✓</b>
Removable bell	<b>✓</b>
Removable foot	✓
Metal whisk kit	<b>✓</b>
Detachable whisk	<b>✓</b>
EasyPlug	✓
Dimensions	Total length with tube 790 mm with whisk: 805 mm, Ø 125 mm
Gross weight	7.9 kg
Accessories	Wall support - Included

#### Choose your model:



MP 350 Combi Ultra	Ref.
MP 350 Combi Ultra 220-240V/50-60/1	34860L
MP 350 Combi Ultra 240V/50-60/1 UK plug	34861L
MP 350 Combi Ultra 120V/60/1	34865L

### MP 450 Combi Ultra

500 V	٧
-------	---

onigie p	hase
	9 000 rpm for mixer, 250 to 1 500 rpm k with self regulating speed system
	450 mm - all stainless steel
✓	
✓	
✓	
✓	
✓	
<b>√</b>	

8.2 kg

Wall support - Included

MP 450 Combi Ultra	Ref.
MP 450 Combi Ultra 220-240V/50-60/1	34870L
MP 450 Combi Ultra 240V/50-60/1 UK plug	34871L
MP 450 Combi Ultra 120V/60/1	34875L

	MP 350 Combi Ultra	MP 450 Combi Ultra
Options	Ref.	Ref.
MP Combi whisk attachment	27210	27210
Mixing attachment	27355	27355
Mixer foot	39354	39355
EasyGrip removable handle	27359	27359





NP 450 F.W. Ultru

### MP 450 FW Ultra

Power	500 W
Voltage	Single phase
Speed	250 to 1 500 rpm (self regulating system)
Whisk	280 mm long detachable whisk
Metal whisk box	<b>√</b>
EasyPlug	✓
Dimensions	Length 800 mm, Ø 125 mm
Gross weight	8.6 kg
Accessories	Wall support - Included

Choose your model:



MP 450 FW Ultra	Ref.	
MP 450 FW Ultra 220-240V/50-60/1	34880L	
MP 450 FW Ultra 240V/50-60/1 UK plug	34881L	
MP 450 FW Ultra	34885L	

### MP 450 XL FW Ultra

500 W
Single phase
150 to 510 rpm (self regulating system)
Detachable mixing attachment 690 mm long
✓
✓
Length 1210 mm, Ø 175 mm
8.6 kg
Wall support - Included

MP 450 XL FW Ultra	Ref.	
MP 450 XL FW Ultra 220-240V/50-60/1	34280L	
MP 450 XL FW Ultra 240V/50-60/1 UK plug	34281L	

