

# TOUCH SCREEN UNDERCOUNTER TYPE DISHWASHER

CODE : FGDW-075T11110W-AD  
MODEL : WBY-50T-PDT



Heavy  
Duty



Easy  
Maintenance



Hygiene



Efficiency

## MAIN FEATURES

- User-friendly touchscreen panel
- Easy to follow washing steps with dynamic and colored screen
- Stainless steel body including washing and boiler tank.
- Hygienic washing tank.
- 35/27/23/20/18 racks per hour (Rack dimensions 50X50 cm)
- 2.8 ltr. water consumption per cycle
- On-screen easy-to-failure status monitoring
- Digital Pressure switch for washing tank
- Adjustable detergent / Rinse aid time from the screen panel
- Non-returned - check valve system
- Saves energy, detergent, and water
- Easy start-up: Single button for water filling and heating in the boiler tank.
- Adjustable feet for height optimization
- The dishwasher is completely sealed to guarantee IPX5 water protection
- Electrical components and cabling according to international standards and safety regulations
- Washing and rinsing temperatures thermo-stop controlled.  
Washing temperature at 55-60°C (water supply at a minimum of 2 bar and 50°C)
- Rinsing temperature at 80-85°C (water supply at a minimum of 2 bar and 50°C)

## ACCESSORIES

- Electrical Connection Cable, Flexible Water Supply, and Drain Hose
- 3 Baskets Promotional (Plate rack, Glass rack, and Cutlery round basket)
- Detergent Dispenser
- Rinse Aid Dispenser
- Drain pump





Plate Rack



Glass Rack



Cutlery  
Round Basket

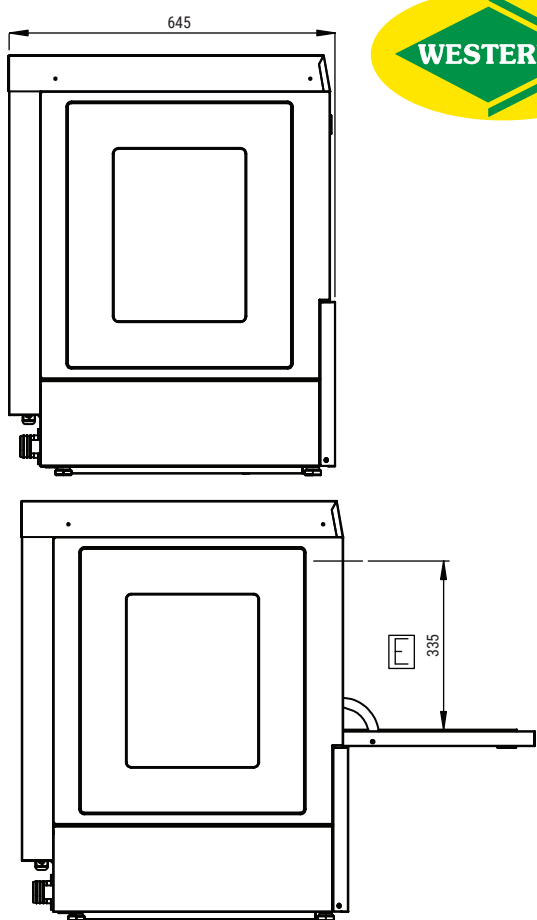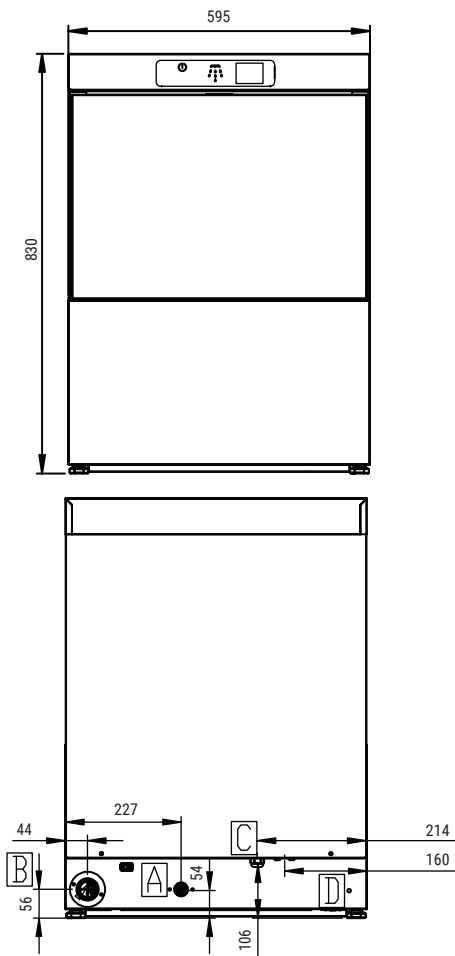

## STANDARDS

- EN 60335-1 European Standard relating to the safety of electric appliances
- EN 60335-2-58 European Standard relating to the safety of electric appliances



## DIMENSIONS (Net)

Width (mm):	595
Depth (mm):	645 (661 with handle)
Height (mm):	830
Weight (kg):	70 (+/- 5)

## DIMENSIONS (Shipping)

* Width (mm):	700
* Depth (mm):	750
* Height (mm):	1000
* Weight (kg):	120
* Volume (m³):	0.53

## TECHNICAL FEATURES

Washing Capacity (Basket/hr)	: 35/27/23/20/18
Washing Tank Capacity	: 27 ltr.
Boiler Tank Capacity	: 6 ltr.
Washing Pump Power	: 0.66 kW
Rinsing Pump Power	: 0.25 kW
Washing Heat power	: 2 kW
Rinsing Heat power	: 5 kW
Max. Noise	: 70 dBA
Loading Height	: 335 mm

### ELECTRICITY CONSUMPTION

- 5.5 kW 220-240 V 50 Hz

### WATER-IN

- Cold Water Inlet: 3/4 inch
- Hot Water Inlet: 3/4 inch
- Water inlet pressure: 2-4 Bar

### DRAIN

- Dirty water discharge connection: 3/4 inch (Ø28 mm)
- Protection class: IPX5